

L458MA04T1A01

Mono channel constant voltage WIFI/PUSH and DMX out on ARTNET

Monochannel Dimmers with Output Voltage PWM.

Input Range: 8-53V DC.

Output Voltage PWM 8-53V DC with current from 0A to 12A (576W at 48V DC).


Controllable with Android/iOS app Omni.

Input Controls	
Type	Qty
Insulated Push button	1
Wifi	1

Output Sync	
Type	Qty
DMX512	1
PWM	1

TECHNICAL NOTES

- Monochannel Dimmers with Output Voltage PWM.
 - Input Range: 8-53V DC.
 - The device is not equipped with earth connection Protection against accidental contact with live parts is guaranteed by the enclosure.
 - Power Connector Cross-section of conductors 14-30 AWG (0.05-2.08 mmq).
 - Interface Connector Cross-section of conductors 15-30 AWG (0.05-1.65 mmq).
 - Output Voltage PWM 8-53V DC with current from 0A to 12A (576W at 48V DC).
 - Controllable with Android/iOS app Omni.
 - Input Controls: Insulated Push button x1, Wifi x1.
 - Output Sync: DMX512 x1, PWM x1.
 - PWM Frequency: 390 Hz.
 - Printed Circuit UL.
 - Protection Class: IP20.
 - Standard Dimension 40x80x24.45 mm.
 - Dimension with accessories 40x100x24.45 mm.
 - Works with Hey Google.
 - Compatible with Amazon Alexa Voice Assistant through the skill Newlab.
 - Works with IFTTT.
 - Open circuit protection.
 - To supply the device you have to use a SELV power supply in order to maintain the required electrical security level.
- All connections must be made with non-live devices and carried out by specialized personnel.
- If the control voltage of the PUSH input is higher than the SELV voltage it is necessary to use the OPTIONAL terminal / cable cover to keep the product in CLASS II.
 - Use only in dry conditions.
 - Google and all related marks are trademarks of Google Inc. or its affiliates.
 - Amazon, Alexa, and all related marks are trademarks of Amazon.com, Inc. or its affiliates..
 - IFTTT and all related marks are trademarks of IFTTT Inc. or its affiliates.

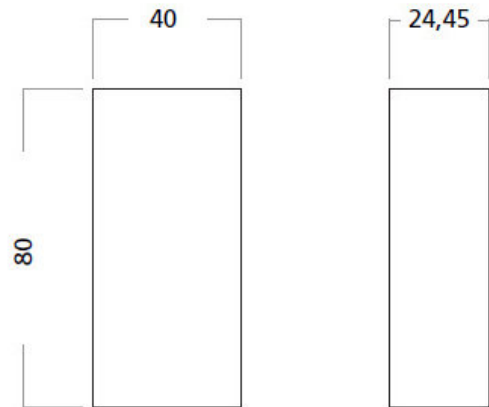

CODE	INPUT VOLTAGE	(MAX) OUTPUT CURRENT	N. OUTPUT CHANNELS	MAX OUTPUT POWER	CONTROL INPUTS	CASE	DIMENSION mm
L458MA04T1A01	8-53V DC	12A	1	576W at 48V DC	Insulated Push button x1 Wifi x1	YES	40x80 h 24.45